

Uninterrupted Process Continuity

during generator change-over.



Smart Hybrid Power for Processing & Automation Industry



Ensures smooth operation of
Process equipment, line motors, heaters,
compressors etc without any variation in speed.

Model
Glider-303 30KVA-300KVA

Saves electricity bills by **35%-40%** in
comparison to conventional Online UPS.





www.ArviUPS.com
OEM/ODM UPS manufacturer since 1998.

Enhanced Process Availability

Leading to better Productivity & Profitability

Active Shunt Smart Hybrid Power Technology

The DSP based Award winning Active Shunt Topology Seamlessly augments the Power Interruption - Gliding the connected loads from Mains to generator and back without any variation in speed/jerk of motors or flicker of lights.	Even the brief process interruption due to generator change-over (typically 40secs-60secs in Auto changeover) shuts down the process leading to loss of material and productivity.
Saves approximately 35%-40% of electricity bills in comparison to Online UPS.	The conventional solution for the above is an Online UPS which has the inherent problem of double conversion losses (Varying from 10% -30% as the power drawn from the processing varies) leading to huge losses in terms of electricity bills.

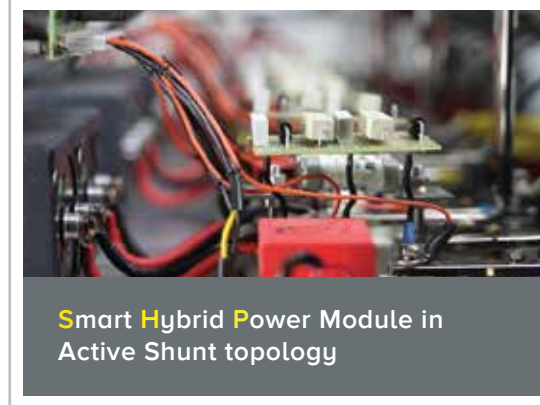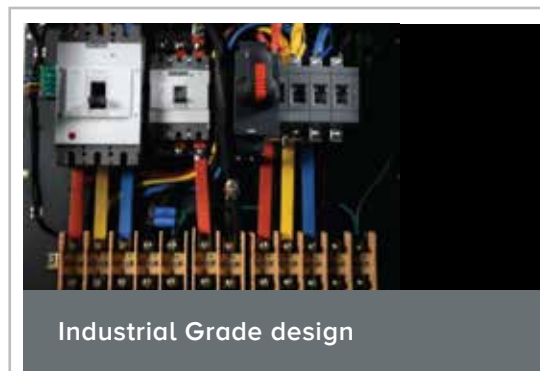

DSP based Technology

Manufactured in our

100% Indigenous Factory - With In-House R&D.


Applications

- Wire EDMs
- CNC Machines
- Dyeing & Bleaching Industry
- Bottling Plant
- Knitting & Weaving Machines
- Food Processing
- Automated Plants
- Processing Industry

Zero transfer time using Active Shunt Single conversion topology.

Active shunt - National award winner

"Most innovative power solution of the year 2016" by SoftDisk

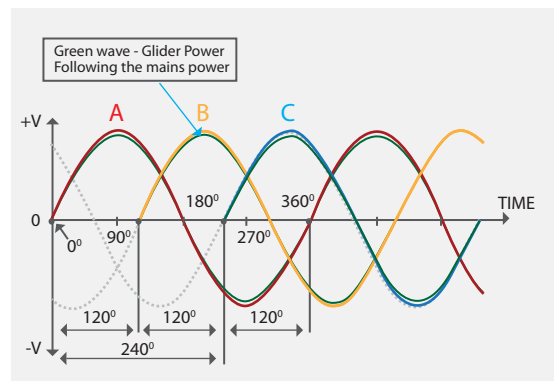

Winner of the Best in-house R&D among the UPS manufacturers in India by SoftDisk for the year 2018-19

The backup Hybrid Power module actively tracks & follows the utility power supply in Active Shunt mode without supplying any power to the load as shown in the graph, untill the voltage drops to a pre-determined voltage achieving Zero transfer time without double conversion.

Benefits of Glider 303



- Zero changeover without double conversions. Saves approximately 35% - 40% electricity bills in comparison.
- Lesser number of batteries.
- Lower cost of ownership.



Dual Output

There is dual output termination to facilitate power saving along with fail-safe operation of process. **Active Shunt PLUS power output** - Conditioned powerfor the sensitive loads; can also handle regenerative loads.

Remote monitoring within the factory premises (100mts) wireless transmission without any GSM connectivity.

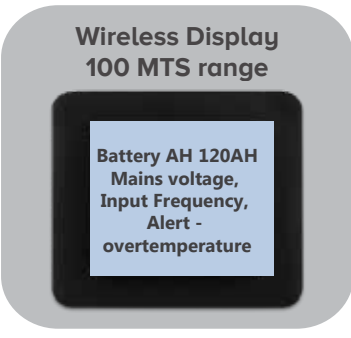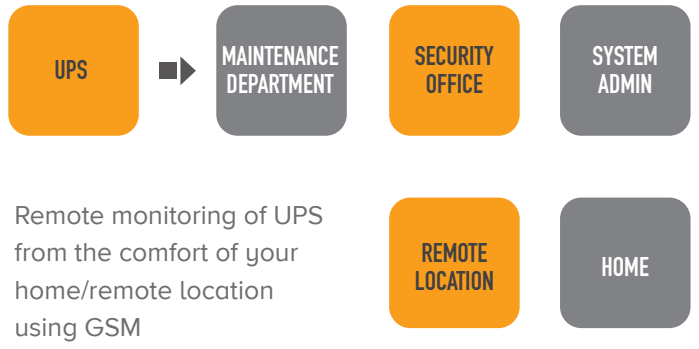

MODBUS, SNMP, GSM, RS485 Interface
BMS Compatible

SNMP-Simple Network Monitoring Protocol

Monitoring

Diagnosis

SNMP feature facilitates the user to carry-out preventive action remotely without physically reaching the UPS. Pre-trip alarm pops on the monitoring screen prompting the user/system admin/maintenance engineer to initiate preventive action.

Without the SNMP feature, the pre-trip alarms are often unnoticed as the UPS is located away from the users and can cause ungraceful shutdown of machines / servers / process.

GSM Interface

GSM based SMS pre-trip alert for initiating necessary preventive action.

Monitor the UPS mains input voltage, output voltage, battery voltage, load percentage etc from a remote location.

Preventive action

SMS STATUS from the registered mobile number and get instant SMS about the mains input voltage, output voltage, battery voltage, load current etc. Also receive SMS alert for pre-trip like battery low, overload and over temperature.

Glider 303 30KVA - 300KVA

TECHNICAL SPECIFICATIONS Smart Hybrid Power Backup

RATING		30KVA - 300KVA
DC BUS		120VDC - 360VDC
INPUT		
Input Voltage		400VAC, 3Φ - 3Φ / 220VAC, 1Φ - 1Φ
Input Voltage Window		± 15%
Input Frequency		50Hz ± 6%
Charger Type		CVCC
OUTPUT		
On Mains Mode		400VAC, 3Φ - 3Φ / 220VAC, 1Φ - 1Φ
Transfer time		0-2msec
Battery to Mains and Mains to battery		
On Inverter Mode		400VAC, 3Φ - 3Φ / 220VAC, 1Φ - 1Φ
Regulation	Balanced Load	(±) 1%
	Unbalanced Load	(±) 1%
Frequency		50 Hz ± 0.1Hz
Waveform		True Sinewave
Total Harmonic	Linear Load	< 2%
Distortion	Non Linear Load	< 6%
Over Load Capacity	100%	Continuous
	125%	1 Minute
	150%	5 Seconds
Inverter Type		IGBT based PWM with instantaneous Sinewave Control
Transient Response		Remains within ± 5% & recover to 100% within one cycle
Crest Factor		3:1
Unbalanced Load Phase Shift		120°± 0.5°
Manual Bypass		Provided
Active Shunt PLUS		Conditioned power for sensitive loads
EFFICIENCY		
On Mains Mode		>99 %
Inverter Efficiency		>88-92%



80/A2, 1st Main, 3rd Cross, 2nd Phase Industrial Suburb, Yeshwanthpur,
Bangalore 560 022. Karnataka, India
Phone: +91-80-4155 8550 (5 lines) +91-80-23470657 / 23470658
enquiry@arviups.com • associates@arviups.com



Govt. of India certified
Importer & Exporter
Code: 0708009123

MEMBER OF
NSIC
Registration No.
NSIC/KAR/GP/RS/KT/A-169/2010



D&B
D-U-N-S No. 65052622
NSIC-D&B-SMERA



Approved vendor for

Our esteemed customers have been using Glider-303 for various applications across the country from past 6yrs and have certified the performance of the same.



PARTIAL LIST

www.ArviUPS.com
OEM/ODM UPS manufacturer since 1998.